



ONU OT-4040VW – Configurando conexão VOIP na ONU OT-4040VW

A ONU OT-4040VW vem com uma ATA integrado, possibilitando a configuração de uma linha VoIP. Porém é necessário que a conexão seja criada, para que a mesma se conecte e funcione corretamente. Abaixo temos um pequeno tutorial de configuração.


Acesse as configurações do equipamento (IP padrão: 192.168.1.1 Login/senha: admin/admin);

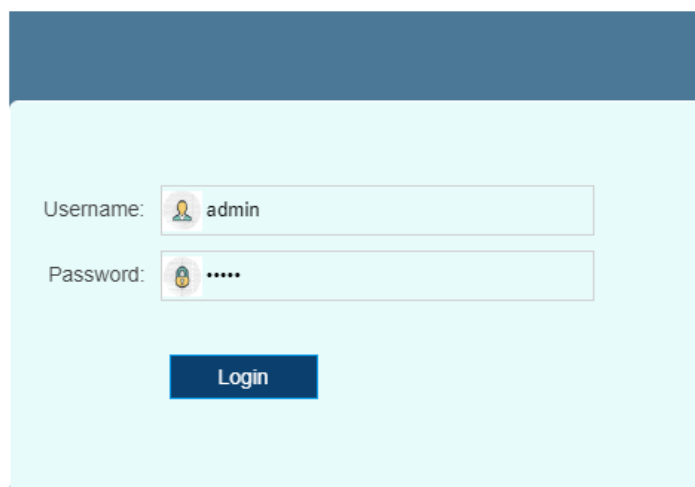

A seguir, vá até a aba “App” e em seguida em “Voip Settings”

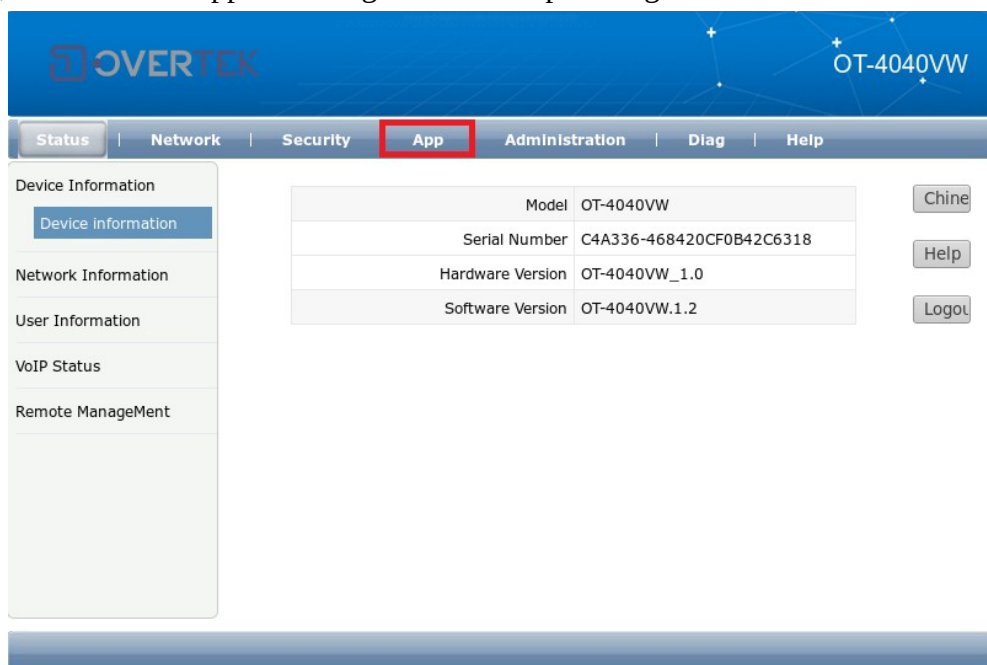


Model	OT-4040VW	Chine
Serial Number	C4A336-468420CF0B42C6318	Help
Hardware Version	OT-4040VW_1.0	Logot
Software Version	OT-4040VW.1.2	

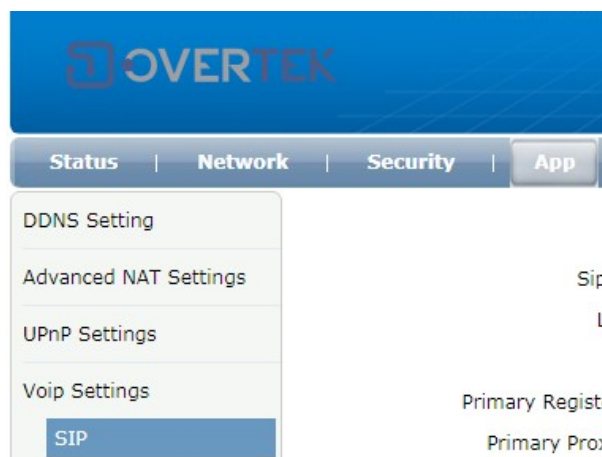

OBS: Lembrando que é necessária que uma conexão WAN seja criada previamente, e adicionado no “Service List” uma das opções de voz.

Na lista do lado esquerdo, a opção “SIP” exibe todas as configurações de conexão. Preencha conforme as informações do seu servidor VoIP, escolhendo “**Sip Protocol**” como **IMS SIP** e inserindo o IP do servidor em “**Primary Register Server, Primary Proxy Server e Primary Outbound Proxy Server**”

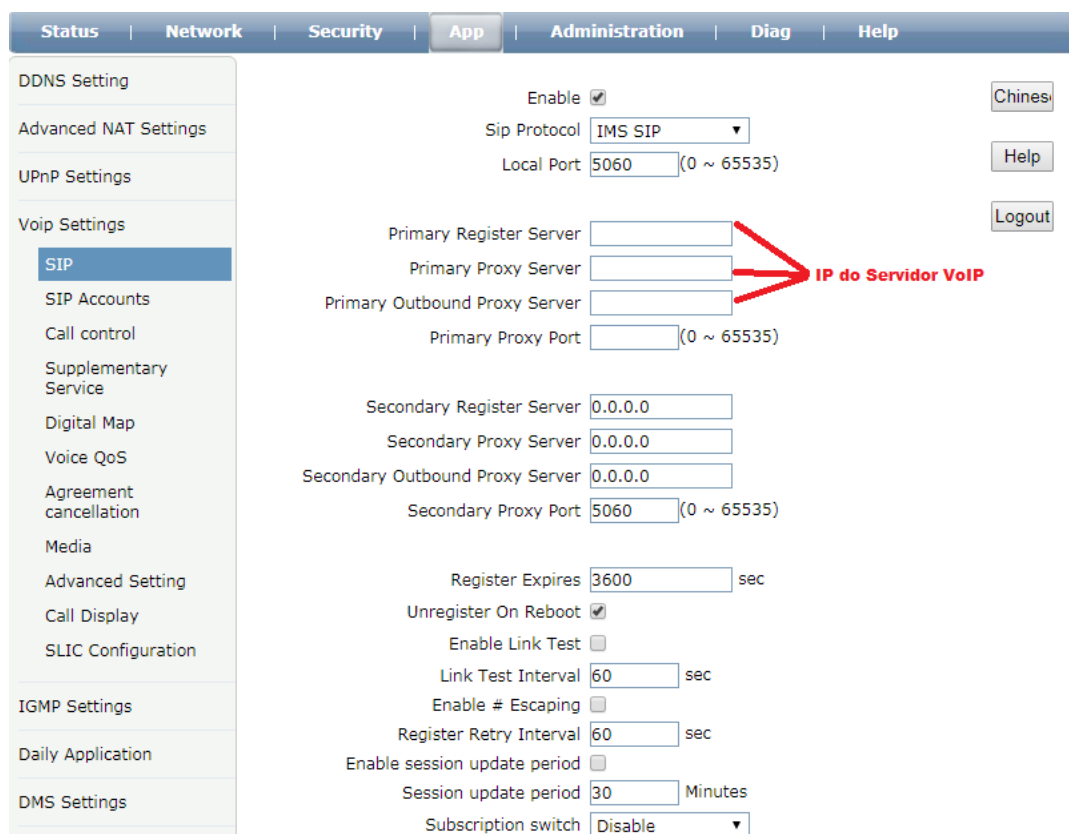

Novamente na lista do lado esquerdo, em “**SIP Accounts**”, deve-se ser configurada a conta que será utilizada, como no exemplo abaixo:

The screenshot shows the 'SIP Accounts' configuration page. On the left is a sidebar menu with options: DDNS Setting, Advanced NAT Settings, UPnP Settings, Voip Settings, SIP, and SIP Accounts (selected). The main area contains configuration fields: 'Enable' (checked), 'Sip Account' (value: - TI), 'Password' (masked with dots), and 'Auth User name' (value: 802). There are 'Modify' and 'Cancel' buttons below these fields. On the right, there are buttons for 'Chines', 'Help', and 'Logout'. At the bottom, a table displays the current configuration:

Enable	Sip Account	Auth User name	Modify
YES	- TI	802	

Para verificar o status da conexão VoIP, clique na aba “**Status**” e em “**Voip Status**”:

The screenshot shows the 'VoIP Status' page. The top navigation bar includes 'Status', 'Network', 'Security', 'App', and 'Administration'. The left sidebar menu has options: Device Information, Network Information, User Information, VoIP Status, Register Status (selected), and SIP Account. The main content area displays a table with the following data:

Phone	Phone1
Register Status	Registered